
Technical Sheet

NP 1200
Hulplade strimler

The size of a naiplate is specified by t x A x B (see illustration).
Note: The orientation of the nailpattern is specified by A x B. Nailplates outside of standard range can be manufactured as retangles, parallelograms etc. Likewise the standards, the orientation of the nailpattern is specified by A x B.

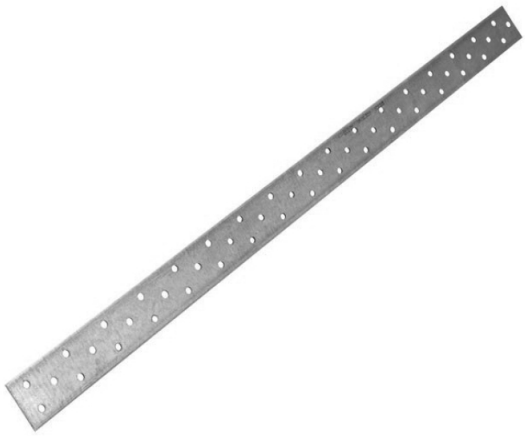

Features

Material

<u>Kvalita oceli:</u>
S 250 GD+Z 275 dle norem DIN EN
<u>Ochrana proti korozi:</u>
275 g/m pozinkováno z obou stran cca 20mm
U-Scheibe:
<u>Kvalita oceli:</u>
S 235 JR dle norem DIN EN 10025
<u>Ochrana proti korozi:</u>
Tloušťka vrstvy pozinkování asi 55 mikronů v souladu s DIN EN 1461

Výhody

- Nailplates can be manufactured in sizes and shapes acc. to customer needs and requirements
- Can be used where standard nailplates are not available

Applications

Použitelné materiály

Dřevo, dřevěné materiály.


Oblast použití

- NP nailplates are used as strap plates in wooden constructions of any kind
- NP are used in particular for preparation of trusses and collar beam trusses. TRÆ 28 provides detailed instructions about this subject
- Always use 2 nailplates per assembly

Technical Sheet

NP 1200
Hulplade strimler

Technical Data



Rozměry

Reference	konektor rozměry					
	ostatní		rozměry výrobku[mm]			otvory[mm]
	množství v krabici	hmotnost[kg]	A[mm]	B[mm]	tloušťka[mm]	Ø
NP20/40/1200	15	0.7	40	1200	2	Ø5
NP20/60/1200	10	1.1	60	1200	2	Ø5
NP20/80/1200	10	1.4	80	1200	2	Ø5
NP20/100/1200	5	1.7	100	1200	2	Ø5
NP20/120/1200	5	2.1	120	1200	2	Ø5
NP20/140/1200	5	2.4	140	1200	2	Ø5
NP20/160/1200	5	2.8	160	1200	2	Ø5
NP20/200/1200	5	3.5	200	1200	2	Ø5
NP20/220/1200-B	5	3.8	220	1200	2	Ø5
NP20/240/1200-B	5	4.1	240	1200	2	Ø5
NP20/260/1200-B	5	4.5	260	1200	2	Ø5
NP20/280/1200-B	5	4.8	280	1200	2	Ø5
NP20/300/1200-B	3	5.2	300	1200	2	Ø5
NP25/40/1200	-	0.88	40	1200	2.5	Ø5
NP25/60/1200-B	10	1.3	60	1200	2.5	Ø5
NP25/80/1200	5	1.8	80	1200	2.5	Ø5
NP25/100/1200-B	5	2.2	100	1200	2.5	Ø5
NP25/120/1200-B	10	2.6	120	1200	2.5	Ø5
NP25/140/1200	5	3.1	140	1200	2.5	Ø5
NP25/160/1200	5	3.4	160	1200	2.5	Ø5
NP25/180/1200-B	5	4	180	1200	2.5	Ø5
NP25/200/1200-B	2	4.3	200	1200	2.5	Ø5
NP25/260/1200	-	-	260	1200	2.5	Ø5
NP25/300/1200	-	6.5	300	1200	2.5	Ø5

Installation

Ostatní

- For fixing is used CNA4,0xℓ connector nails or CSA5,0xℓ connector screws
- Wooden parts for assembly should have the same width

Copyright by Simpson Strong-Tie®