

Technical Sheet

FHSD
Mezzanine Floor Screw

FHSD is a drill point screw suitable for wood to light gauge steel installations such as mezzanine floors.





Features

Vorteile

- Ribbed head.
- Winged drill point for pentrating steel.
- Free bit included.

Materiál

- Steel grade AISI1022 acc. to ASTM A510-3 Alternatively C20D acc. to EN 16120-2
- Mechanical: Torsional strength: ftxr ≥ 10.4 Nm. Bending pass 5° bending without breakage or signs of cracking visible acc. to SAE J78 clause 4.3
- Hardness Case hardness 550-650 HV, core hardness: 32-40 HRC
- Coating: Electrodeposited coating ISO4080 - Fe/Zn5/C


Applications


Suitable for:

- Mezzanine floors with a steel thickness of 2 to 4mm.
- Use with Quik Drive tool QDHSD60 or QDHSD75.

FHSD
Mezzanine Floor Screw

Technical Data

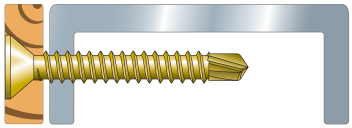



Rozměry a typické hodnoty

Reference	Fasteners rozměry
	ostatní
	hmotnost[kg]
FHSD64E	0.01

Kapacita při plném zahřebíkování

Reference	šroub Loads				
	výrobek Characteristic capacities - dřevo C24 to ocel[kN]				Connection to metal
	hlava pull-through - Fhead,k - dřevo>18mm[kN]				Application
	ocel tloušťka[mm]				
	2[mm]	3[mm]	4[mm]	5[mm]	
FHSD64E	1.55	1.6	1.65	1.7	Holz an Stahl

Copyright by Simpson Strong-Tie®